


Seastars Q38

Seastars Quick Release Q38 Basic User manual



Thank you for purchasing this iFootage product. This instruction manual is applicable to the Seastars Quick Release Q38 Basic. To get the most out of your quick release system please read the manual carefully prior to operating the equipment. Please keep the manual in a safe place for future reference.

The Seastars Q38 features a one-click quick-release design that allows for instant assembly and disassembly with just a gentle press, achieving highly efficient and convenient installation and removal. This innovation ushers your filming experience into a new era of speed and convenience.


Technical Data

Size: 57×42×16mm

Material: Aluminium alloy

Weight: 57g


Component Description

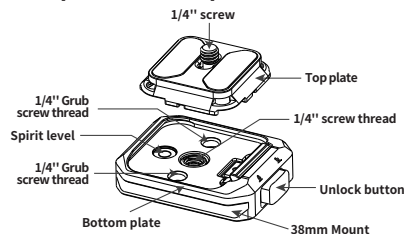

-1-

User Guide

User Guide

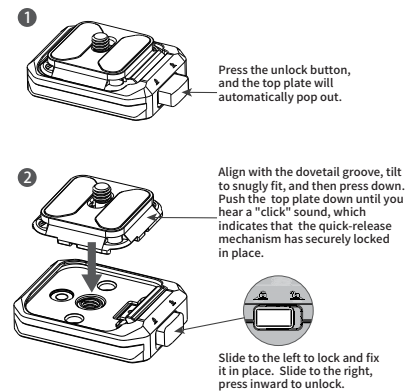


-2-

Installation and User Guide

Install to the Gimbal

The bottom plate has a 1/4" screw hole, which allows you to attach the Q38 quick-release component to the original quick-release plates of the DJI RS4 Pro, RS4, RS3 Pro, RS3, RS3 Mini, RS2, and RSC2 gimbal. Installation Instructions (Using DJI RS2 as an example):

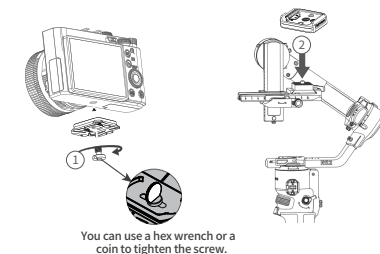

1. Installing the Top Plate


① Attach the top plate to the camera's bottom and tighten its screw to secure it.

2. Installing the Bottom Plate

② Match the bottom plate's 1/4" screw hole with the gimbal's original plate screw and tighten for a secure fit.

-3-

Installation and User Guide

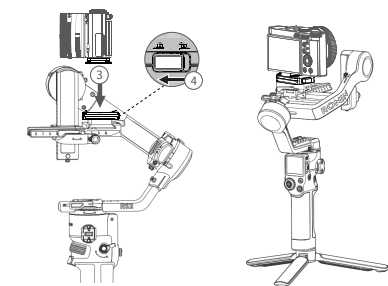

3. Mounting the Camera on a Gimbal

③ Place the camera, which has the top plate installed, vertically into the slot of the bottom plate and press down gently. As you hear a "click" sound, which indicates that the quick-release mechanism has securely locked into place.


④ Finally, slide the lock tightening push button to the left to ensure it is locked and fixed. (To prevent accidentally pressing the unlock button)

-4-

Installation and User Guide


Install to a Tripod

The Q38 bottom plate has a 38mm mount on its bottom, which allows for direct mounting onto a fluid head or tripod with a compatible 38mm mount, offering a convenient and quick assembly and disassembly process.

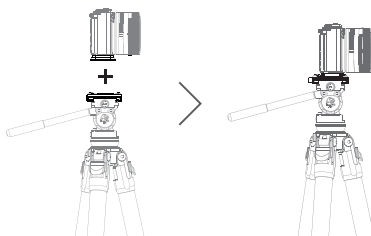

-5-

List of items



Maintenance

1. If there is sand or grit inside the quick release bottom plate, please clean using a small brush or a clean cloth.
2. After use in rain, snow or other wet conditions, clean with a damp cloth. Allow all moisture to evaporate prior to packing away.
3. Handle all parts with care and avoid external pressure during storage.

*Please note that the tripod, fluid head, gimbal and camera are not included in the package and are used for illustrative purposes only.

-6-

Statement

iFootage reserve the right to amend or rectify all hardware and software specifications at any time without notice. If there appears to be any difference between the contents of the instruction manual and the actual product, please refer to the product itself. iFootage and its associates will not be held responsible for the use or misuse of any of the iFootage products or any direct, indirect, punitive, incidental, special consequential property or life damage responsibility. The risk of users or any other person using this product shall be borne by the user. This will not affect your legal rights.

Manufacturer's Information



iFOOTAGE INTERNATIONAL (HK) LIMITED

UK Design & Made in China

Origin: China

Website: www.ifootagegear.com

