


SEASTARS Q38-RS

Seastars Quick Release Q38 Gimbal Plate User Manual



IFOOTAGE


Thank you for purchasing this iFootage product. This instruction manual is applicable to the Seastars Quick Release Q38-RS. To get the most out of your quick release system please read the manual carefully prior to operating the equipment. Please keep the manual in a safe place for future User Guide reference.

The Seastars Q38-RS one-click quick-release system is a revolutionary innovation that overturns traditional methods. It is specifically tailored for DJI gimbal such as the DJI RS4 Pro, RS4, RS3 Pro, RS3, RS2 and RSC2's, allowing for easy and seamless replacement of the original quick-release plates. No matter what shooting scenario you are in, a simple press is all it takes to instantly switch equipment, saving you time and effort while significantly increasing your work efficiency. With cross-brand compatibility, it meets a wide range of needs, freeing your creativity from the constraints of cumbersome equipment changes, and allowing you to fully unleash your photographic inspiration to capture every brilliant moment.

Technical Data


Size: 133x50x24mm Material: Aluminium alloy Weight: 111g

Component Description

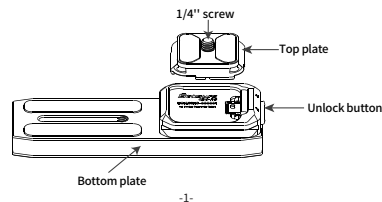

User Guide


User Guide

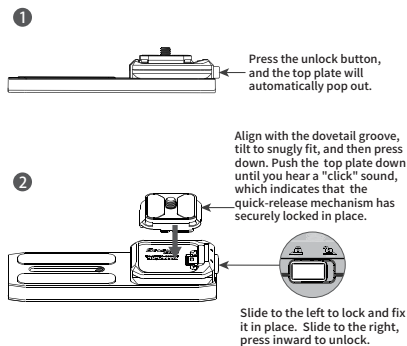

Installation and User Guide

Install to the Gimbal


The Q38 RS bottom plate is specifically designed with a slot tailored for DJI RS4 Pro, RS4, RS3 Pro, RS3, RS2 and RSC2 gimbals, allowing it to directly replace the original quick-release plates for convenient and easy assembly and disassembly. Using the DJI RS2 as an example for installation:

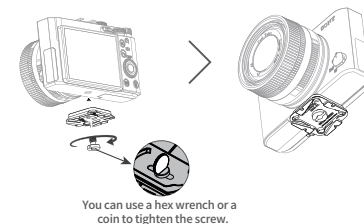

1. Installing the Top Plate

Attach the top plate to the bottom of the camera by aligning it and tightening the bottom screw.


Installation and User Guide

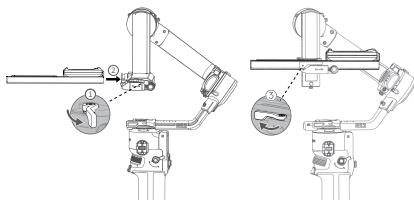

2. Installing the Q38 RS Bottom Plate

- ① First, unlock the buckle on the gimbal.
- ② Then, slide the Q38 RS bottom plate into the gimbal's slot.
- ③ Adjust it forward and backward for a rough balance, and once it's approximately balanced, lock the gimbal's buckle.

Installation and User Guide

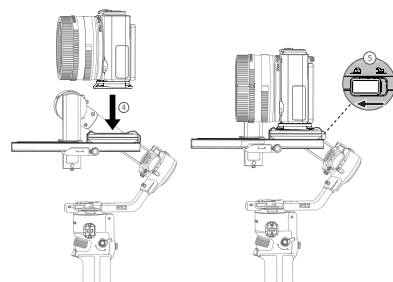

3. Mounting the Camera on a Gimbal

- ④ Place the camera, which has the top plate installed, vertically into the slot of the Q38 RS bottom plate and press down gently. As you hear a 'click' sound, indicating that the quick-release mechanism has securely locked into place.
- ⑤ Finally, slide the lock tightening unlock button to the left to ensure it is locked and fixed. (To prevent accidentally pressing the unlock button)

List of items



Q38-RS Body



User manual



Product certification

Maintenance

1. If there is sand or grit inside the quick release bottom plate, please clean using a small brush or a clean cloth.
2. After use in rain, snow or other wet conditions, clean with a damp cloth. Allow all moisture to evaporate prior to packing away.
3. Handle all parts with care and avoid external pressure during storage.

*Please note that the camera and gimbal are not included in the package and are used for illustrative purposes only.

Statement

iFootage reserve the right to amend or rectify all hardware and software specifications at any time without notice. If there appears to be any difference between the contents of the instruction manual and the actual product, please refer to the product itself.

iFootage and its associates will not be held responsible for the use or misuse of any of the iFootage products or any direct, indirect, punitive, incidental, special consequential property or life damage responsibility. The risk of users or any other person using this product shall be borne by the user. This will not affect your legal rights.

Manufacturer's Information

IFOOTAGE

IFOOTAGE INTERNATIONAL (HK) LIMITED

UK Design & Made in China

Origin: China

Website: www.footagegear.com

