




Gazelle Tripod Instruction Manual

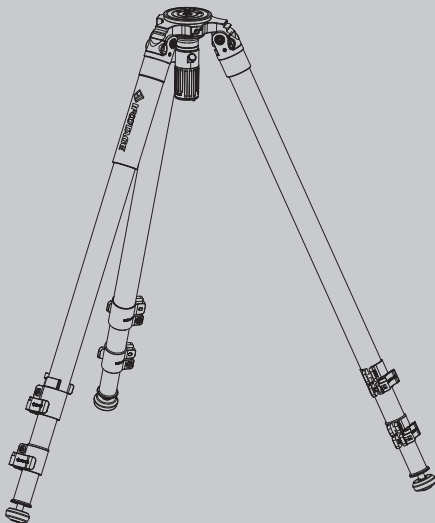

CATALOGUE

■ FEATURES	1
■ LIST OF ITEMS	1
■ TECHNICAL DATA	1
■ COMPONENT DESCRIPTION	2
■ USER GUIDE	3
• USING THE QUICK RELEASE BALL HEAD HANDLE	3
• HEAD CONNECTION	4
• ANGLE OF ADJUSTMENT FOR LEGS	5
• LOW ANGLE USAGE	6
• USING THE FOOT PADS AND SPIKES	7
• LEG EXTENSION	8
■ MAINTENANCE	8

FEATURES

1. Easy to operate unique, patented, ball head, quick release system.
2. Simple to use, robust buckle leg locking system.
3. A combination of high quality, superior grade carbon fiber and aluminium magnesium alloy materials provide increased strength, rigidity and durability.


LIST OF ITEMS




Tripod



Carry bag



Instruction manual



Warranty card



Product certification



Leg adjustment tool

TECHNICAL DATA

TC9

Weight

2.36kg

Section

3

Maximum Load

12kg

Material

Carbon Fiber

Folded Height

710mm

Maximum Height

1650mm

Minimum Height

200mm


Leg Adjustment Angles

22°、55°、77°

Leg Diameter

34mm、30.2mm、26.4mm

COMPONENT DESCRIPTION

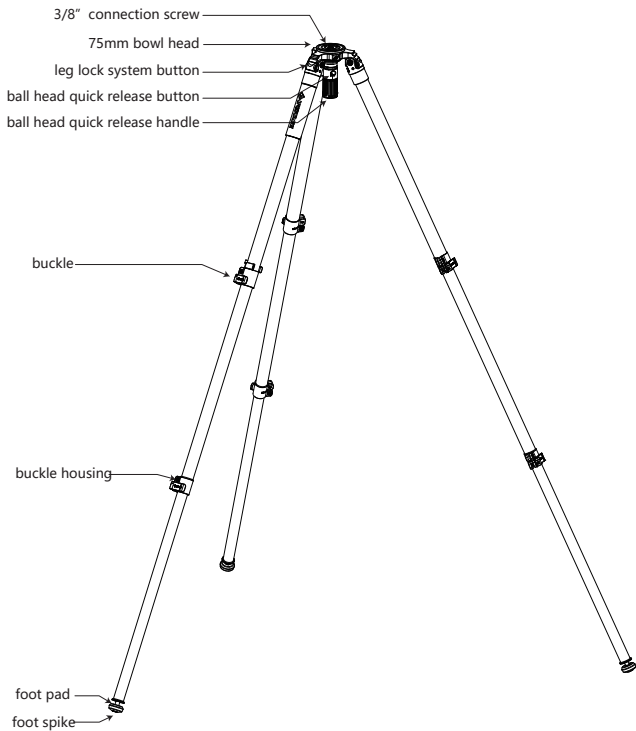


USER GUIDE


01

USING THE QUICK RELEASE BALL HEAD HANDLE

1




2




1 To release ball head, turn handle 1 rotation anti-clockwise

2 Press the release button on handle and pull down

3





4



3 To re-attach, press the release button and push handle up towards ball head

4 Release button and rotate handle clockwise to lock


02 Head connection

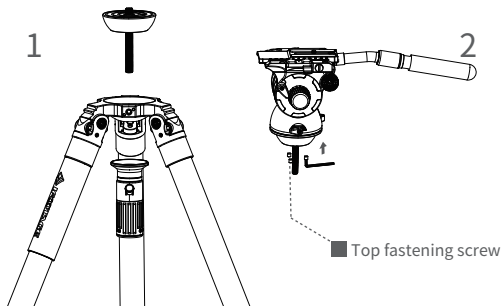

- 1 Unscrew the lock mechanism to remove the hemisphere base.
- 2 Attach the hemisphere base to the flat video head and tighten 3/8" screw. Tighten the three top fastening screws.
- 3 Mount the unit onto tripod and adjust the ball head to horizontal, then tighten the locking handle.


03

Angle of adjustment for legs

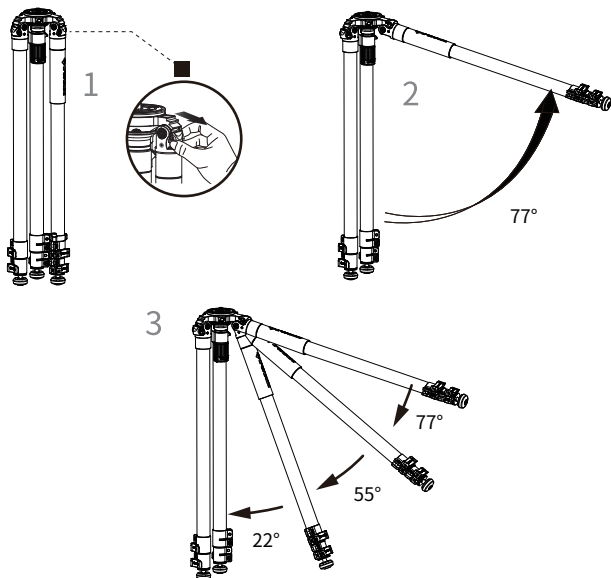


- 1 Pull the leg lock system button located at the top of the leg “up”.
- 2 Raise the leg which will automatically lock into one of three preset position/angles.
- 3 Each leg will lock automatically at the following angles: 77° , 55° or 22° .

04 Low angle usage

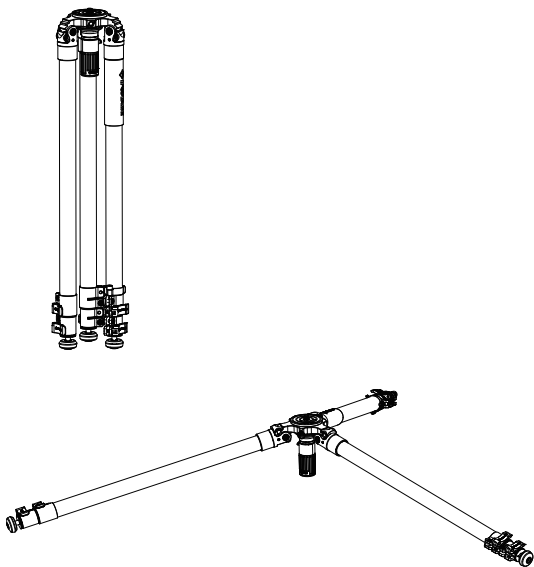

For low angle usage, retract all three legs and adjust to 77° angle setting.


05 Using the foot pads and spikes

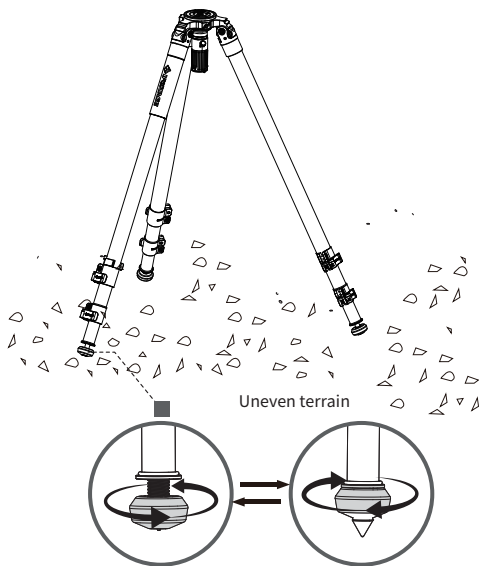

Muddy terrain



Ice



Slippery or wet surfaces

Rotate each rubber footpad to reveal the foot spike and turn in opposite direction to enclose the foot spike.

The dual option of foot pads and spikes allows you to use the tripod in a variety of locations and conditions.

USER GUIDE


06

Leg extension

1 Buckle usage



Release the buckle, pull leg out to desired length and lock buckle for each leg.

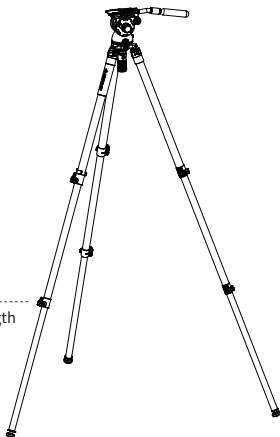

MAINTENANCE

1. This is not a toy. Children must be properly supervised by a guardian/adult when this product is in use.
2. Do not disassemble, adapt, crush, bend, deform, shred, microwave or incinerate this product or any of its component parts.
3. Do not use the product near a high voltage area.
4. Do not exceed the product's load capacity as stated in the specification.
5. Only qualified personnel may repair this product.
6. Do not use lubricant on this product. Abrasive cleaning tools should be avoided.

*Notice: The camera head is not included with this product and is used for illustrative purposes only.

STATEMENT

iFootage reserve the right to amend or rectify all hardware and software specifications at any time without notice. If there appears to be any difference between the contents of the instruction manual and the actual product, please refer to the product itself.

iFootage and its associates will not be held responsible for the use or misuse of any of the iFootage products or any direct, indirect, punitive, incidental, special consequential property or life damage responsibility. The risk of users or any other person using this product shall be borne by the user. This will not affect your legal rights.

MANUFACTURER'S INFORMATION



IFOOTAGE INTERNATIONAL (HK) LIMITED

UK Design & Made in China

Origin: China

Website: www.footagegear.com

